

LED Road Lighting Fixtures

LSTL SERIES



Description

- Body : Die-casting aluminium
- Cover : Die-casting aluminium
- Bolt & Washer : Stainless steel
- Coating : Epoxy coating


Compliance

- KSC 7658


Technical Data

Model No.		SEBP-LSTL			
		80	100	125	150
Electrical Ratings	Rated Wattage	80W	100W	125W	150W
	Input Voltage	90 ~ 264VAC, 50/60Hz			
	Power Factor	≥0.95			
	Surge Protection	5kV (Line to F.G)			
Luminous Ratings	Luminous Flux	9,600lm	12,000lm	15,000lm	18,000lm
	CRI	Minium. 80			
	Luminous Efficiency	Minium. 120lm/W			
	Color Temperature	5,700K ~ 6,500K (3,000K optional)			
Warranty		Five-year limited warranty Minimum. 50,000 hours lifetime			
Ambient temperature		-20°C ~ +40°C			
Type of Protection		IP66			


Dimension

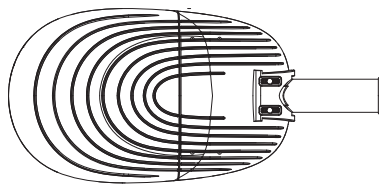


< TOP VIEW >




< L-SIDE VIEW >

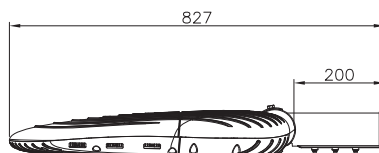

< FRONT VIEW >



< R-SIDE VIEW >

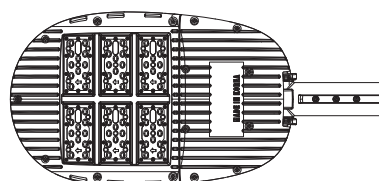

< BOTTOM VIEW >